

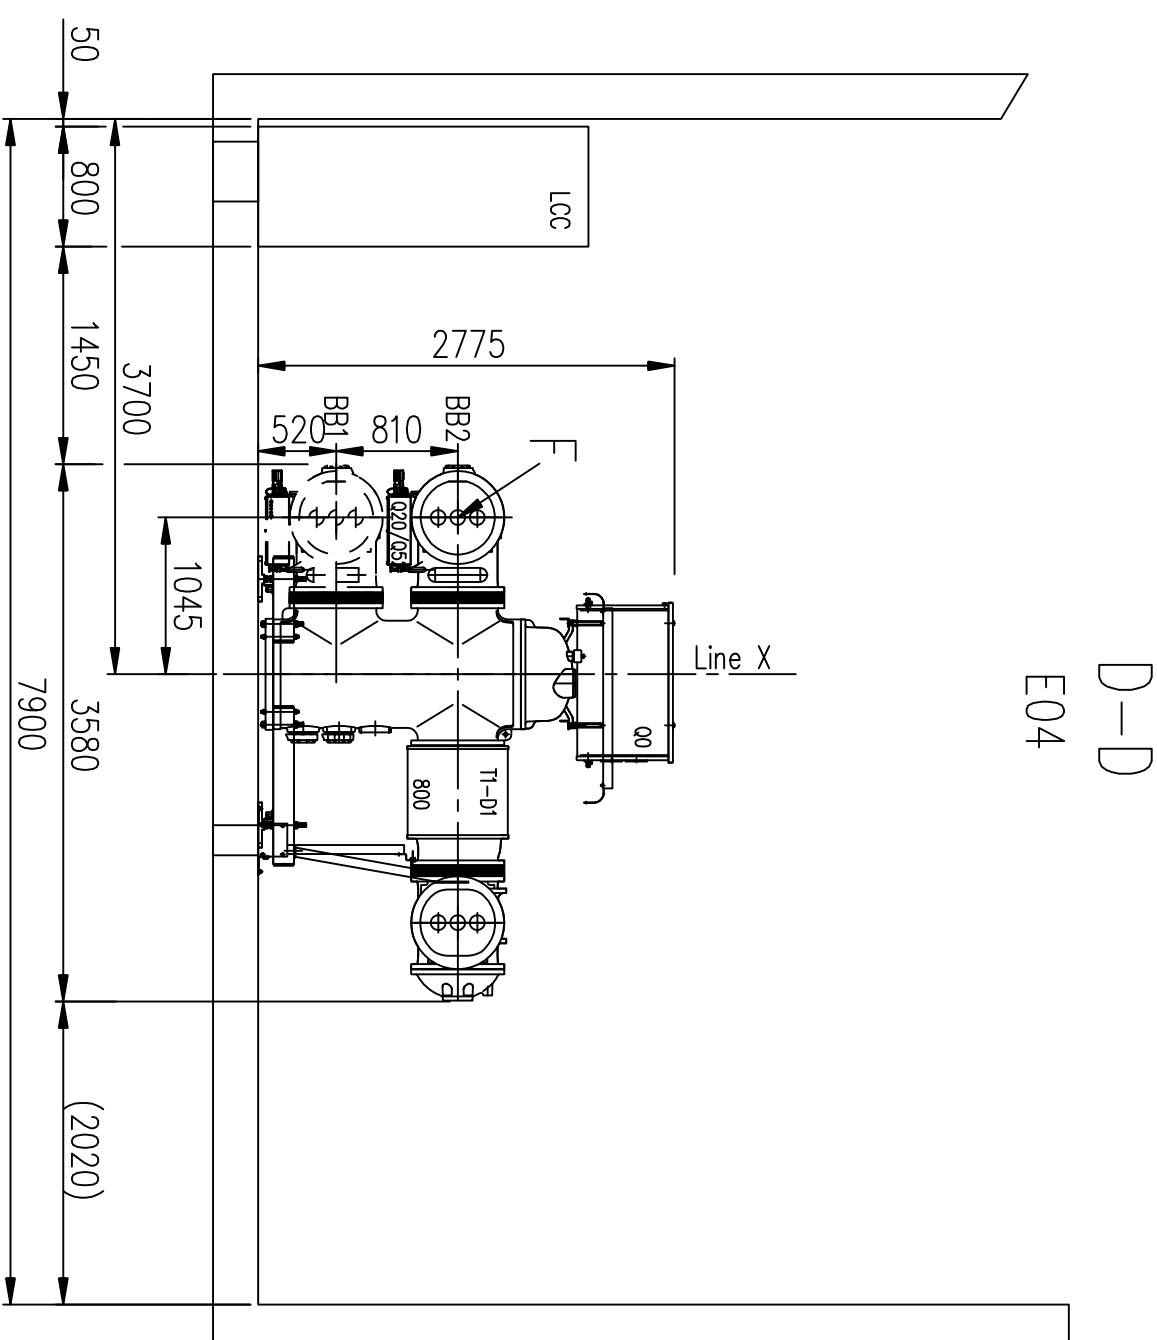
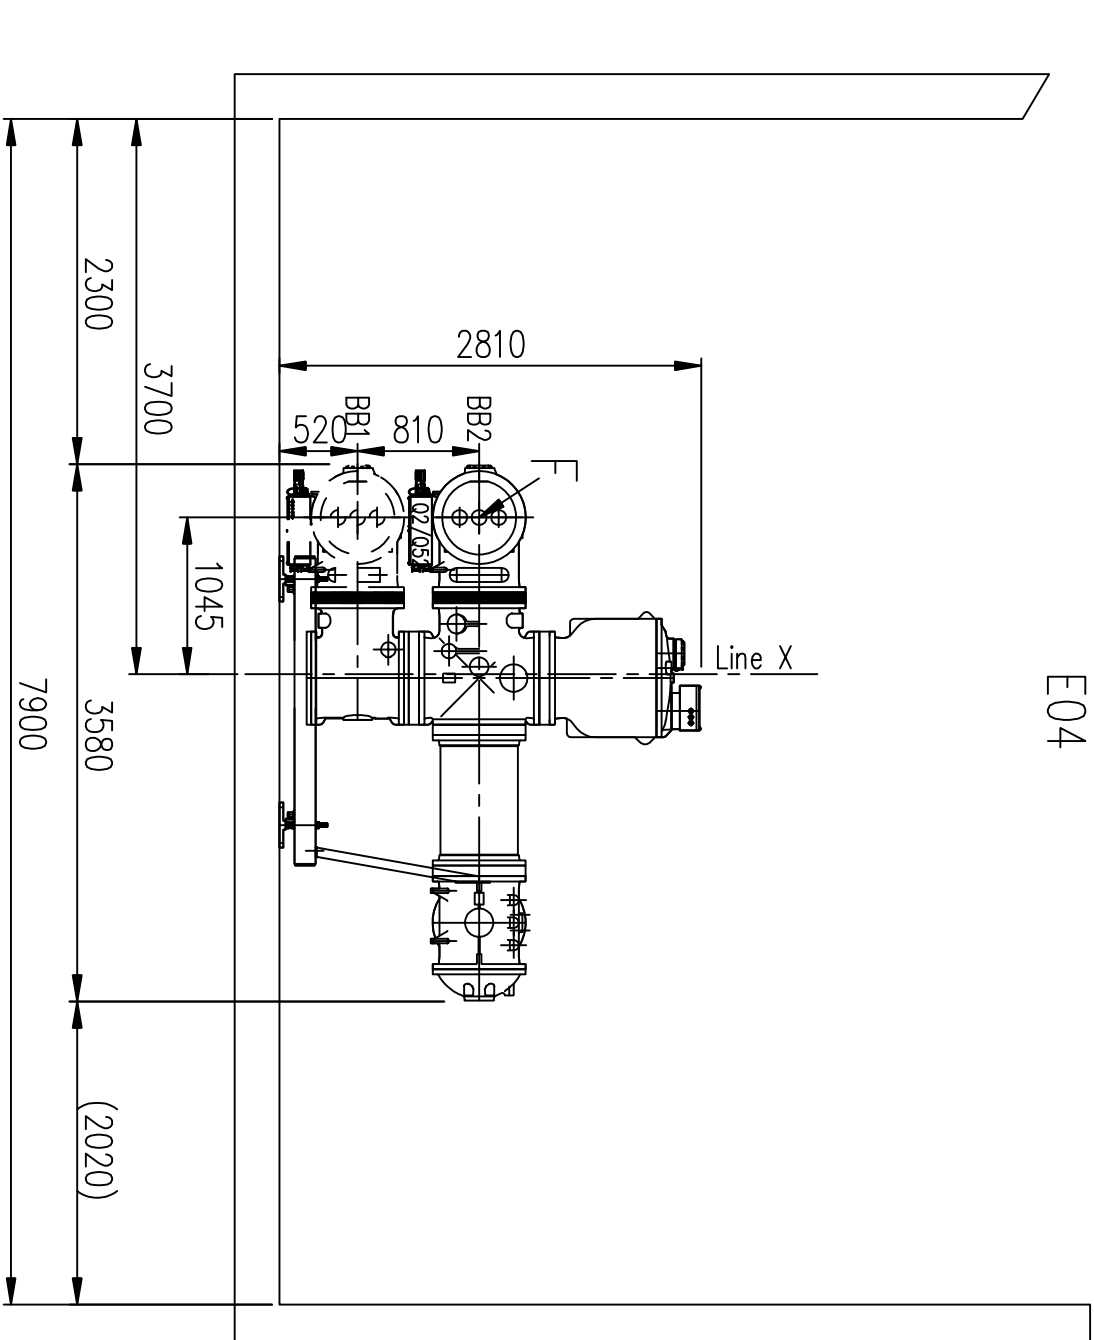
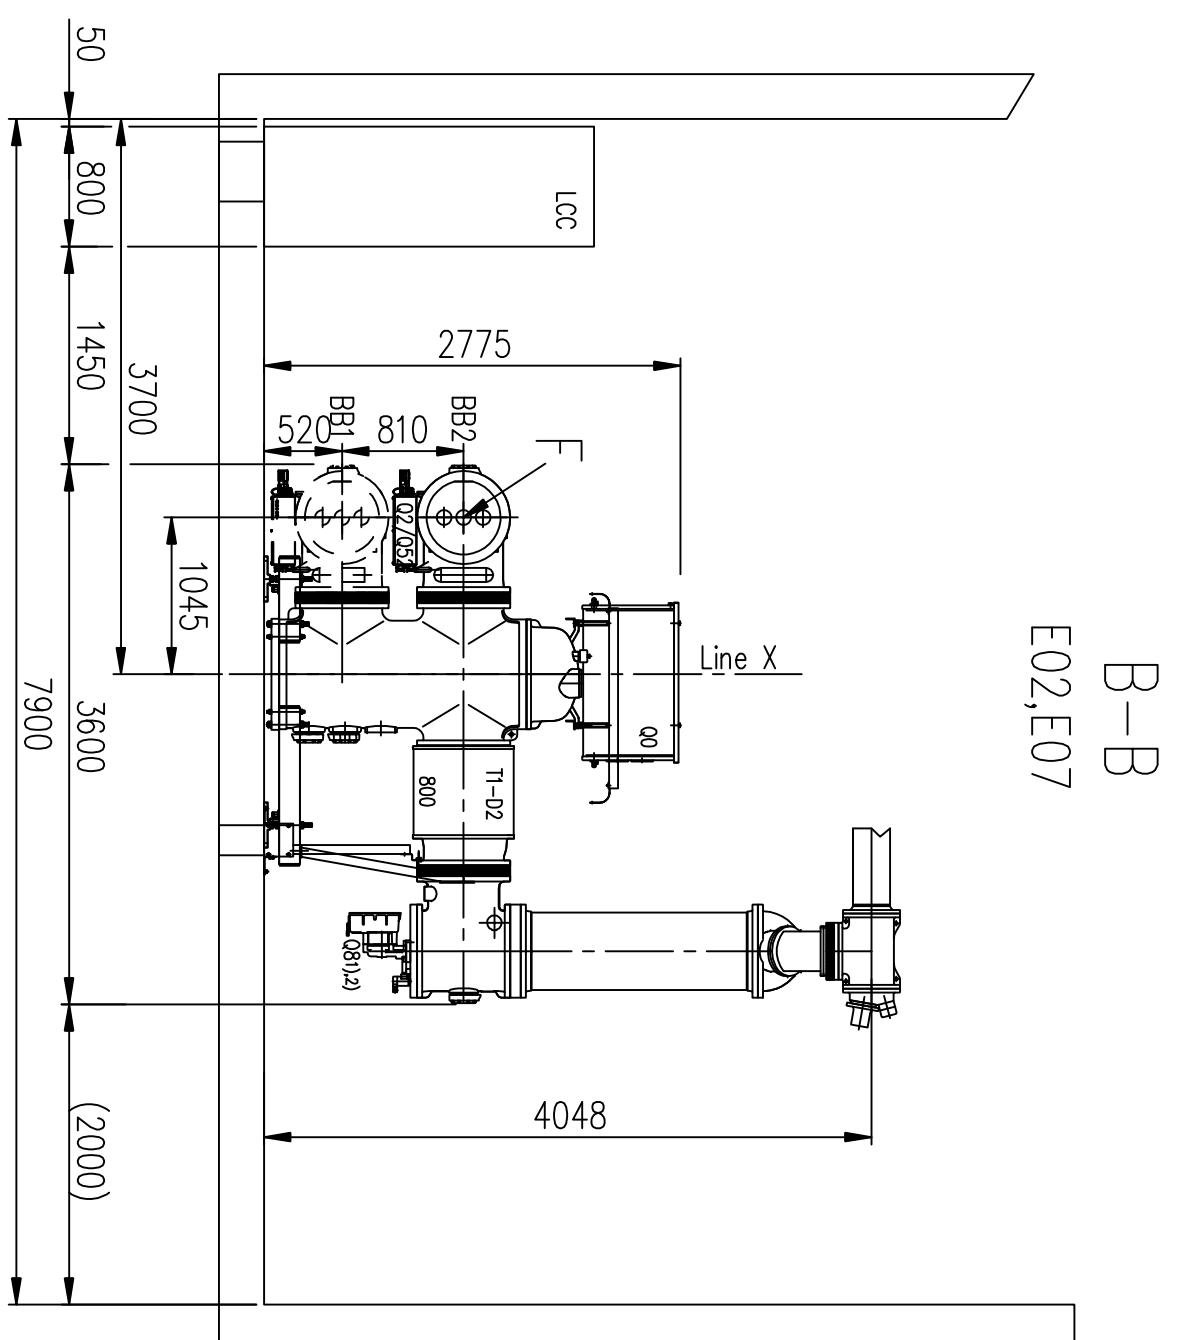
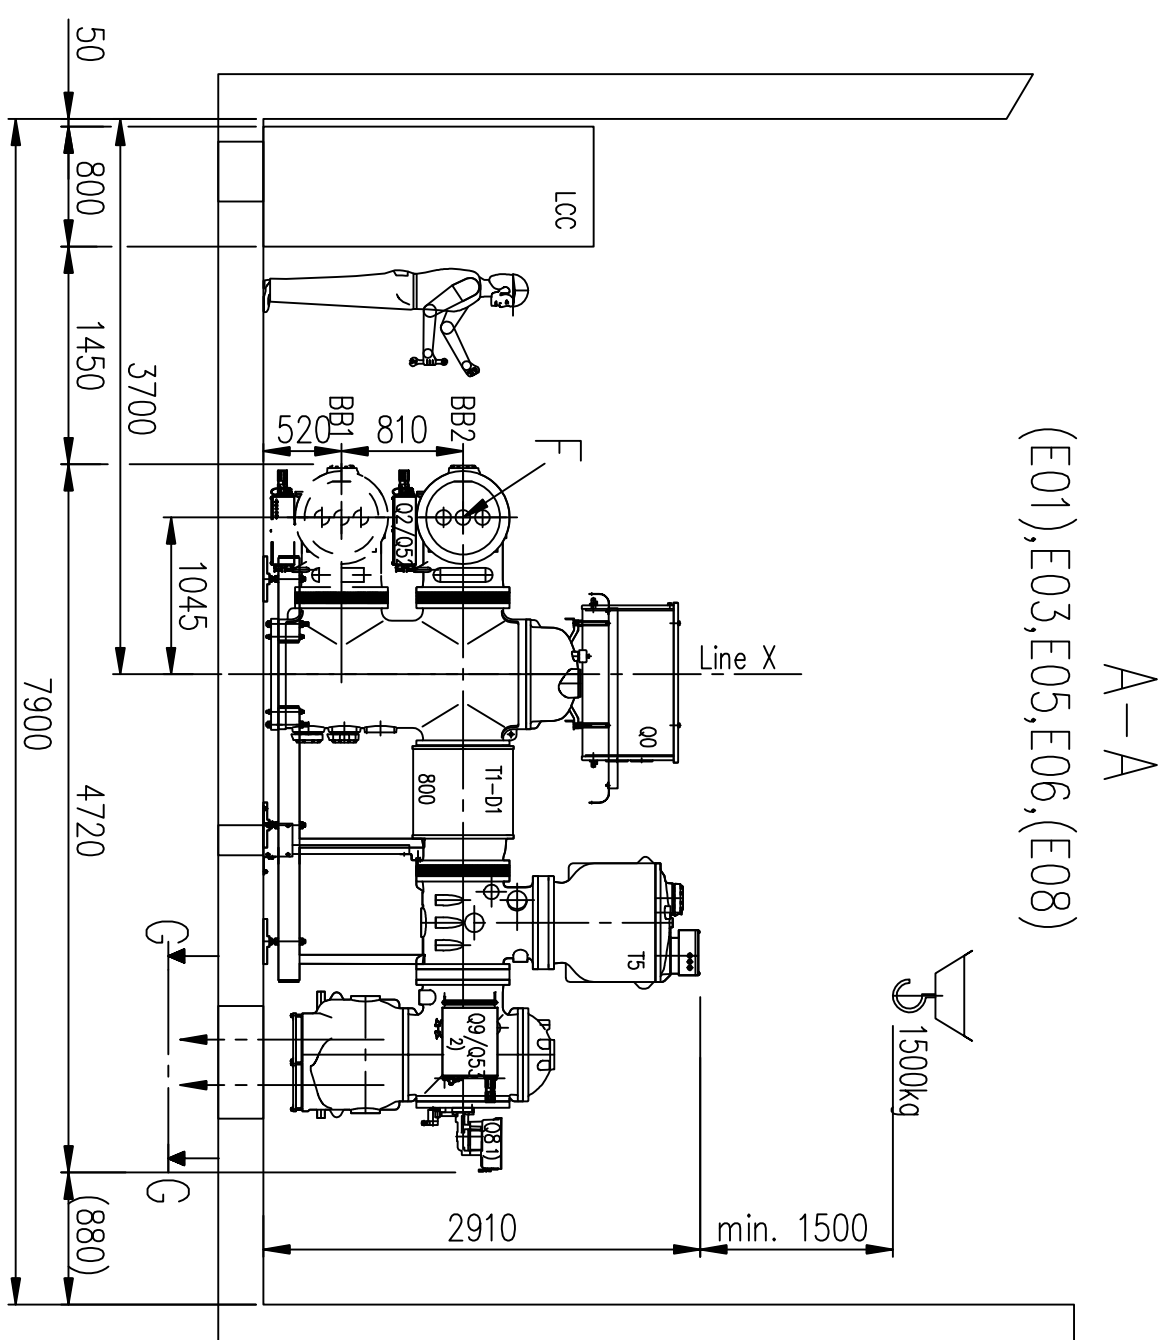


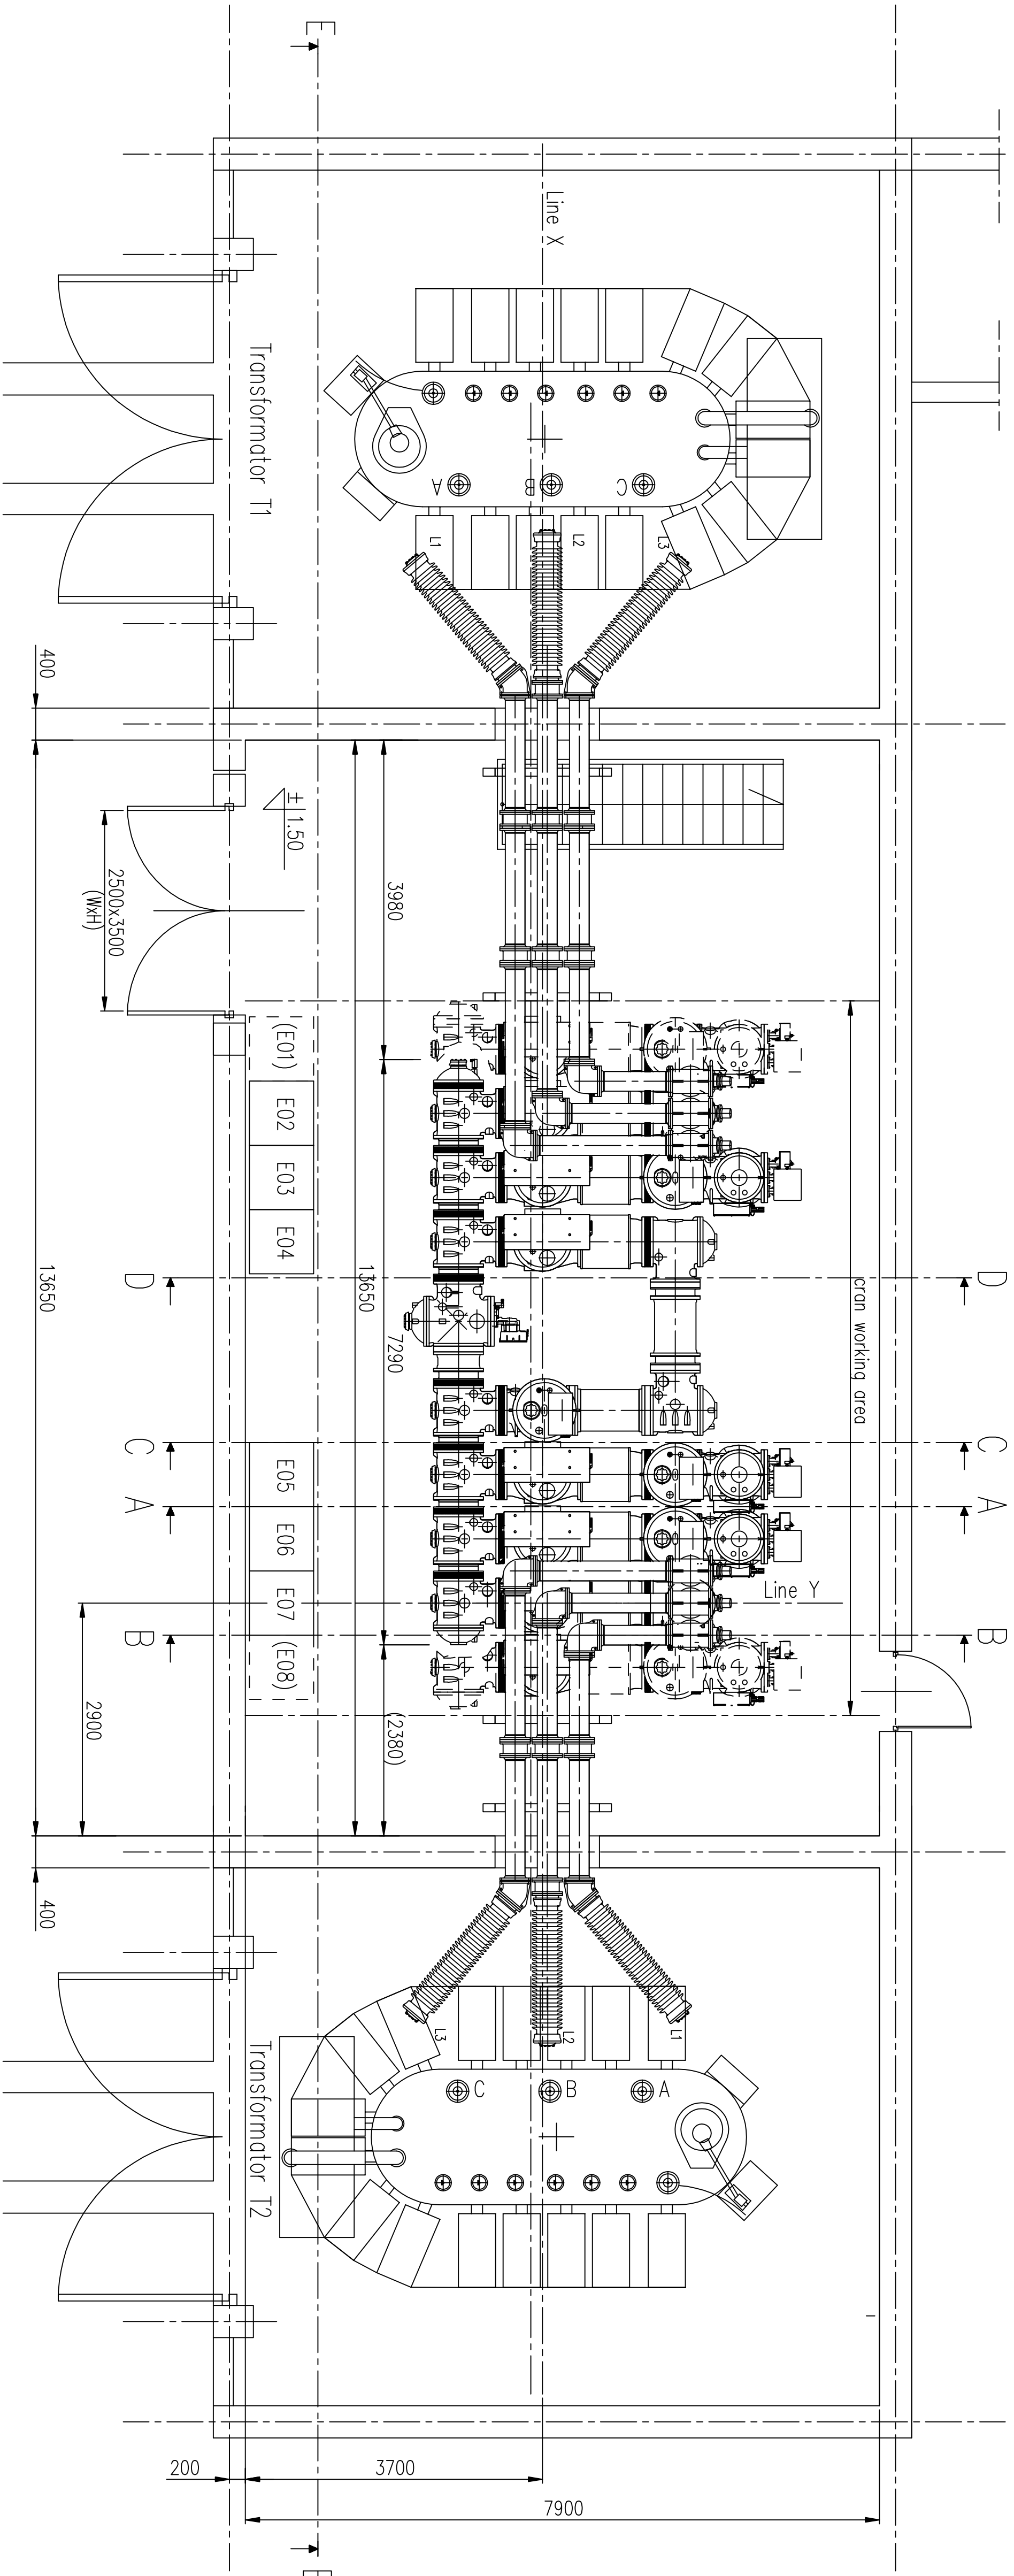

SYMBOL	DENOMINATION
	Circuit-breaker
	Disconnector
	3-Position Disconnector / Earthing Switch
	Earthing Switch with Making Capacity
	Insulated Earthing Switch
	Current Transformer
	Voltage Transformer
	Gaslight Barrier
	Cable Connection
	SF6 Air-Busting

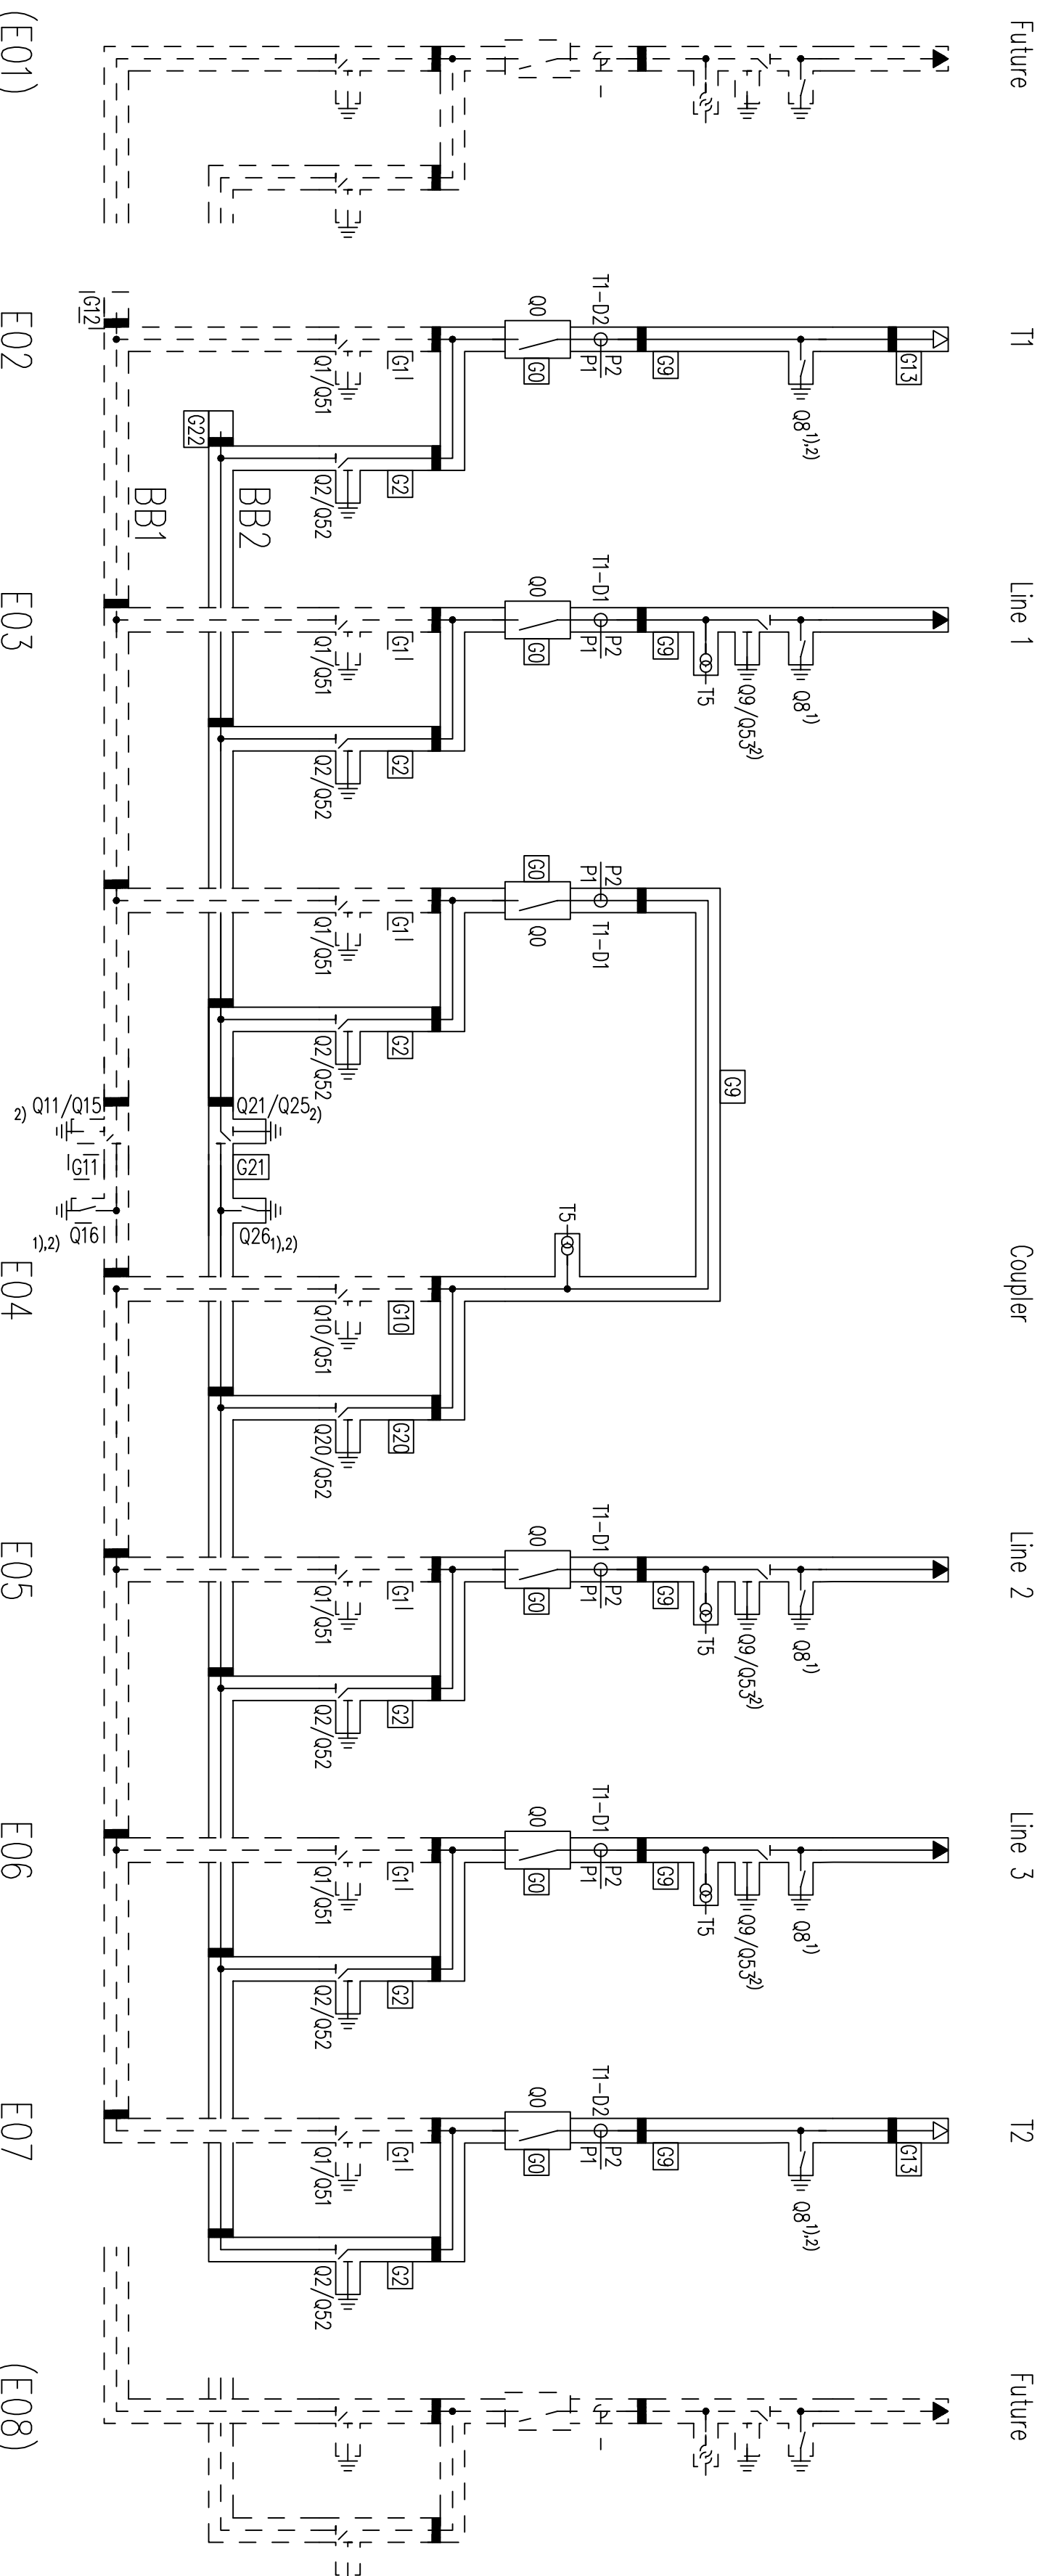

Current Transformer Data				
Bay	Transl.	Core	Ratio (A)	Output (VA)
=E03, =E04				
=E05, =E06				
=E02, =E07				
=E08				
1	T1 (01)	1	800-1600/1	10
2	T1 (01)	2	800-1600/1	10
3	T1 (01)	3	800-1600/1	10
4	T1 (01)	4	800-1600/1	10
1	T1 (02)	1	150-300-600/1	10
2	T1 (02)	2	150-300-600/1	10
3	T1 (02)	3	150-300-600/1	10
4	T1 (02)	4	150-300-600/1	10

Voltage Transformer Data			
Bay	Transl.	Winding	Ratio (kV)
=E03, =E04			
=E05, =E06			
1	T5	1	110 / 0.1 / 0.1 / 0.1
2	T5	2	110 / 0.1 / 0.1 / 0.1
3	T5	3	110 / 0.1 / 0.1 / 0.1

- SF6 Air-Busting:
- Color: Grey
 - Insulator: Composite
 - Creepage distance: 3169 mm
 - Colour/Printing: RAL 7035
 - Gas-Housing: Hot Dip Galvanized
 - Supporting Structure: RAL 7032
 - Local Control Cabinets: RAL 7032

